

AMUZMA®

ABOUT US

AMUZMA is a woodworking machinery manufacturing company dedicated to delivering a wide range of high-quality machines for the modern woodworking industry. Our product line includes various types of machinery designed to meet the needs of furniture manufacturers, workshops, and industrial production units. With a strong focus on quality, durability, and performance, AMUZMA ensures that every machine is built to provide reliable operation and long-term value. We combine practical engineering with efficient design to enhance productivity, precision, and ease of use. At AMUZMA, we are committed to supporting our clients with dependable machinery solutions, consistent service, and continuous improvement to meet evolving market demands.




Our Mission

At AMUZMA, our mission is to deliver high-quality, innovative, and cost-effective industrial machinery that meets international engineering standards. We combine advanced manufacturing technology, precision engineering, and strict quality control to ensure exceptional performance, durability, and reliability.

Through strategic partnerships, continuous innovation, and a growing global distribution network, we aim to make advanced machinery accessible to businesses worldwide. Our goal is to provide reliable and affordable solutions that enhance productivity, improve efficiency, and support sustainable business growth.



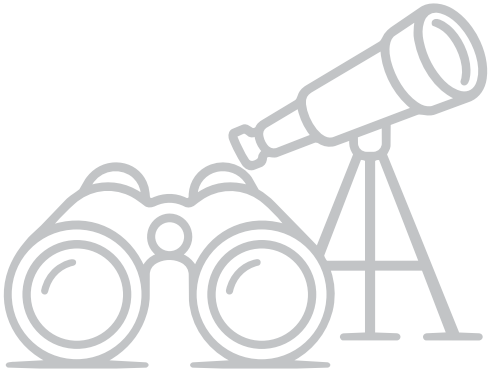

Our Vision

To become a globally trusted leader in industrial machinery, setting new standards in quality, innovation, precision, and affordability.

At AMUZMA, we envision making advanced industrial technology accessible to businesses of all sizes. Building on generations of industry expertise, we combine European engineering standards with cost-effective manufacturing solutions.

Through innovation, global partnerships, and an expanding dealership network, we aim to empower industries worldwide with reliable, high-performance machinery that enhances productivity and drives sustainable growth.

INDEX



Band saw
PAGE 01-04



Beam Saw
PAGE 05-06



Veneer Door Press
PAGE 07-08



Edge Banding
PAGE 09-16



CNC Router
PAGE 17-20



Panel Saws
PAGE 21-34



Spindle Moulder
PAGE 35-36



Thicknesser & Planer
PAGE 37-48



Dust Collectors
PAGE 49-56

ITEMS	PAGE NO.
Band Saw Collections	01-02
Band Saw 65BS	03-04
Beam Saw 33BS	05-06
Veneer Door press C8	07-08
Edge Banding Collection	09-10
Edge Banding E5	11-12
Edge Banding P6	13-14
Edge Banding C7	15-16
CNC Routers Collection	17-18
CNC Firma 15, 20CR	19-20
Panel Saws Collection	21-22
Firma 40PL	23-24
Forte 40PA	25-26
Firma 35PS	27-28
Elite 35PS	29-30
Elite 35EU	31-32
Elite 35TS	33-34

ITEMS	PAGE NO.
Spindle Moulder Elite 30SM	35-36
Planer and Thicknessers Collection	37-38
Planer and Thicknesser Elite 41CM	39-40
Planer and Thicknesser Elite 41CS	41-42
Planer Elite 41PF	43-44
Thicknesser Elite 41TH	45-46
Thicknesser Firma 63TH	47-48
Dust Collector Collection	49-50
Amuzma ABS5000	51-52
Amuzma DC2200	53-54
Amuzma RDC3800	55-56

BAND SAW

Elite 65BS Firma 70BS Firma 80BS Firma 90BS



AMUZMA Bandsaw Series – Elite & Firma

The AMUZMA Bandsaw Series features four powerful models—Elite 65BS, Firma 70BS, Firma 80BS, and Firma 90BS engineered for precision, durability, and industrial performance. Built for smooth, accurate cutting and demanding woodworking applications, the series delivers reliable solutions for resawing, heavy-duty timber processing, and high-volume production.

CONFIGURATION

TECHNICAL SPECIFICATIONS	ELITE 65BS	FIRMA 70BS	FIRMA 80BS	FIRMA 90BS
Blade Specifications				
Blade Length	4470 mm	5110 mm	5589 mm	6151 mm
Blade Width	10-35 mm	10-40 mm	10-45 mm	10-50 mm
Blade Speed	1500 m/min	1500 m/min	1500 m/min	1500 m/min
Max Depth of Cut				
■ With bearing guide.	370 mm	450 mm	540 mm	560 mm
□ With European style roller guide	370 mm	450 mm	540 mm	560 mm
Throat Width	580 mm	688 mm	787 mm	886 mm
Table Size	700*608 mm	1000*780 mm	1155*780 mm	1220*780 mm
Table Tilt	0-20º	0-45º	0-45º	0-45º
Band wheel Diameter	610 mm	700 mm	800 mm	900 mm
Motor Power Output	4kW S1	5.5 kW S6	7kW S6	7kW S6
Brake				
■ Foot Brake				
□ Magnet Motor Brake				
Extractor Port Diameter	2*100 mm	2*100 mm	2*100 mm	2*100 mm
Net/Gros Weight	323/359 Kgs	492/583 Kgs	614/720 Kgs	714/869Kgs
Wood box dimensions	1119 x 777 x 2070mm	1335 x 840 x 2407mm	1440 x 840 x 2550mm	2816 x 1016 x 1630mm
Dimensions	2017 x 1201 x 889mrn			

BAND SAW
Elite 65BS

AMUZMA®



Precision and Power in Every Cut.

The Elite 65BS Bandsaw is built for industrial strength, featuring a heavy-duty welded frame, 35mm blade support, and up to 20,000 PSI tension. Achieve fast, clean, high-precision cuts—perfect for resawing and high-volume production.

SPECIFICATIONS

Blade Specifications		Motor Power Output	4kW S1
Blade Length	4470 mm	Brake	
Blade Width	10-35 mm	■ Foot Brake	
Blade Speed	1500 m/min	□ Magnet Motor Brake	
Max Depth of Cut		Extractor Port Diameter	2×100 mm
With bearing guide.	370 mm	Net/Gross Weight	323/359 Kgs
With European style roller guide	370 mm	Wood box dimensions	
Throat Width	580 mm	HxLxW	1119 x 777 x 2070mm
Table Size	700×608 mm	Dimensions	
Table Tilt	0-20°	HxLxW	2017 x 1201 x 889mm
Band wheel Diameter	610 mm		

■ Standard Equipment □ Optional Equipment

ACCESSORIES



Lower Blade Guides



Upper Blade Guide & Guard




Miter Gauge



Band Saw Wheel (Flywheel)

DIMENSIONS

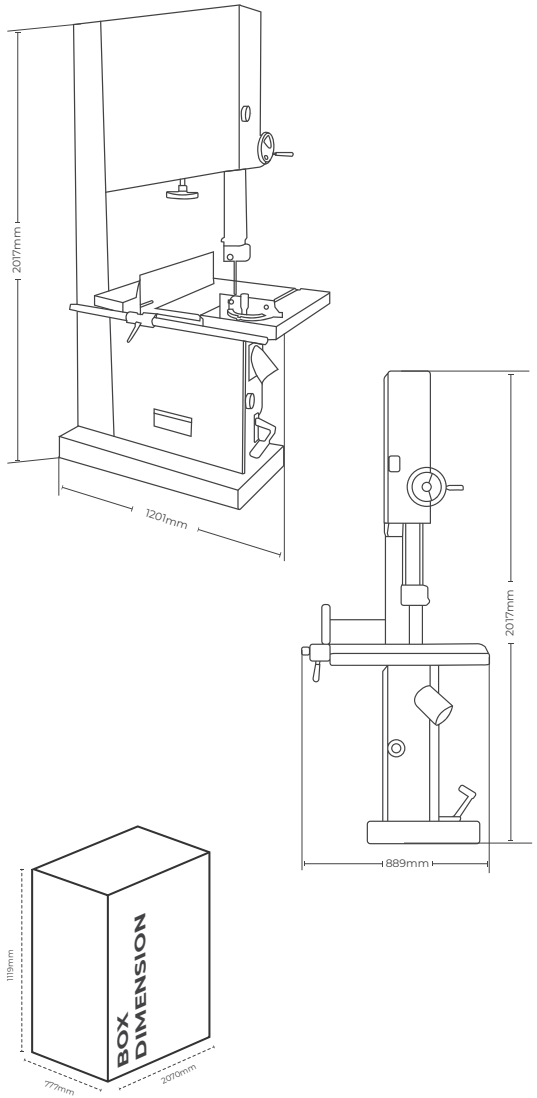



Industrial Precision: The Firma 33BS

The Firma 33BS is a high-performance industrial beam saw designed for high-volume precision, featuring a powerful 16.5 kW motor and a 3300 mm cutting capacity. By integrating automated servo-driven grippers with air-flotation tables and a 19-inch CNC interface, it optimizes throughput and ensures effortless material handling for large-scale furniture manufacturing.

SPECIFICATIONS

TECHNICAL FEATURES	VALUE
Main saw motor power	16.5KW
Auxiliary Saw Motor Power	2.2 kW
Saw Car Running Motor Power	1.8 kW
Robot Servo Motor Power	1.8 kW
Maximum Sawing Length	3300 mm
Sawing Height	100 mm
The speed of the saw	100mm
Blade Speeds	0-120/min
Fan power	4kw*1
Computer display screen	19 inch
Gross power	26.5kw
Overall Dimensions	5900 x 5900 x 1850mm

ACCESSORIES



HMI Operator Station



Gripper Guide
Track Mechanisms





Electrical Control
Cabinet



Infeed Air Tables


DIMENSIONS

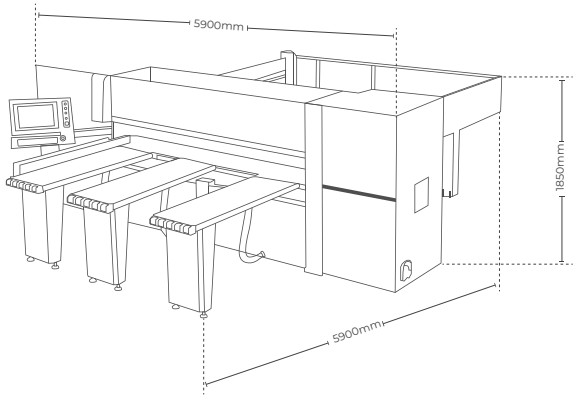

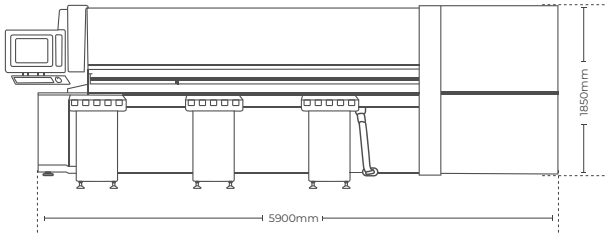

VENEER DOOR PRESS
Firma C8

AMUZMA®

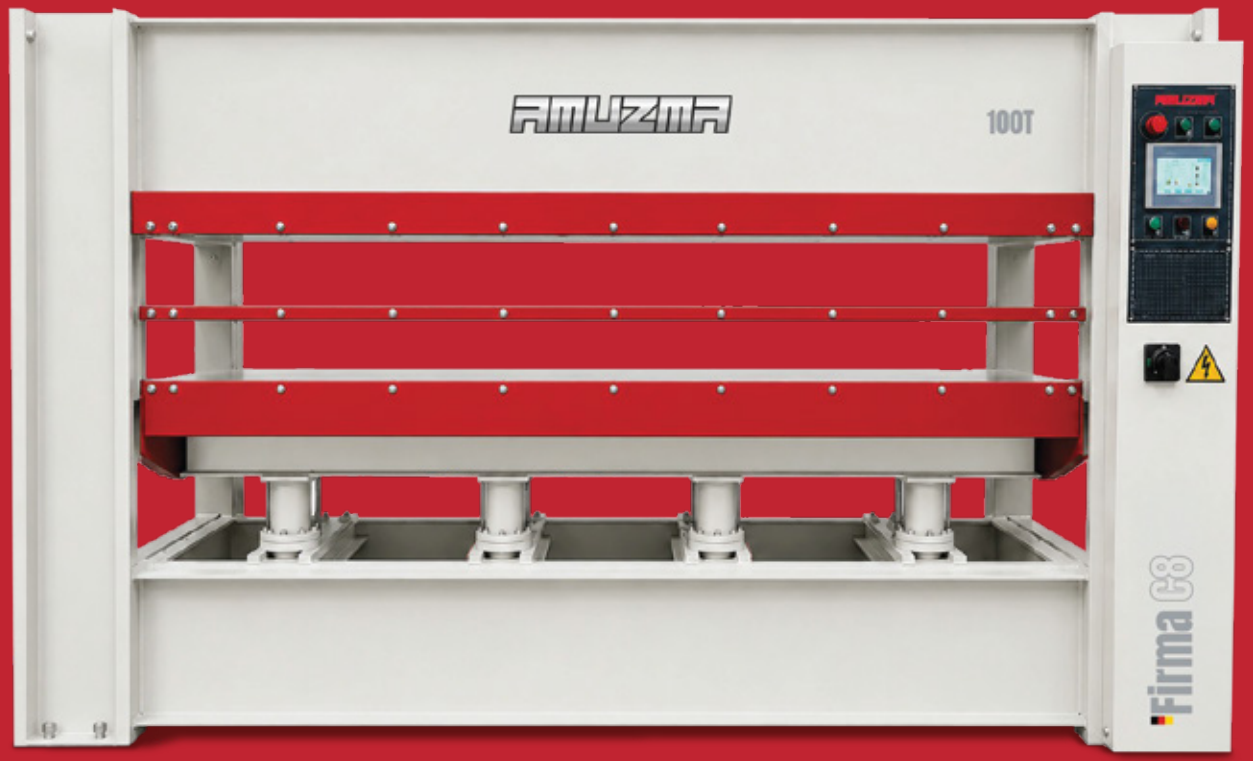

Industrial Multi-Layer Hydraulic Veneer Door Press

This heavy-duty hydraulic press is engineered for high-capacity woodworking operations, specializing in the precision lamination of veneers, high-pressure laminates (HPL), and engineered skins onto flush doors and panels. Built for continuous industrial use, it combines massive pressing force with an efficient multi-layer design to maximize production through put reliability. Perfect for shaping, profiling, and joinery on hardwoods and composites, it delivers exceptional value for serious craftsmen."

SPECIFICATIONS

Total pressure	1000kN
Platen No& size	3~3000x1300x42mm
Specific pressure	2.6kgf/cm²
Cylinder No& diameter	8~85mm
Loading way	Manual horizontal
Heating way	electricity heat thermal oil
Installation power	4+0.75+36 kW
Overall size	4035x1710x2100mm
Working layer	2 layers
Opening	170mm
Cylinder stroke	340mm
Closing speed	30mm/s
Platen open way	Automatic
Power	3PE 380V 50Hz
The max temperature	120℃
Gross weight	7300kg

ACCESSORIES



Control Panel / PLC Interface



Hydraulic Cylinders / Pistons





Heating Platens (Pressing Plates)



Heavy-Duty Machine Frame

DIMENSIONS

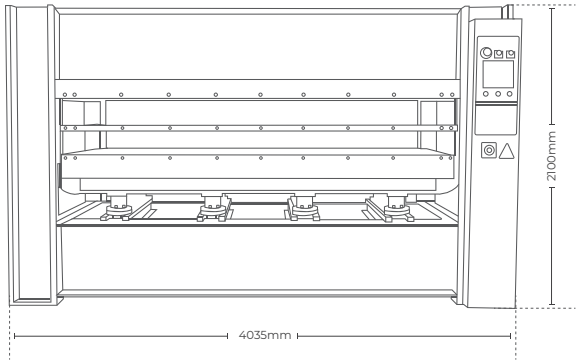

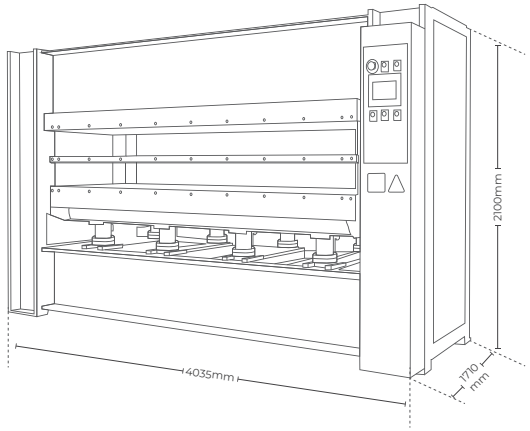

AMUZMA®

Elite E5



Elite P6



Elite C7









Premium Edge Banding Machinery Series

Our industrial-grade Edge Banding Woodworking Machinery lineup—comprising the high-performance ELITE Series (E5, P6, C7) and the robust FORTE Series (E5, P6)—is engineered to deliver flawless, seamless edge finishing for high-volume panel processing. Designed for precision and durability, these modules integrate advanced functionalities, including automated pre-milling, precise gluing, end-trimming, and fine buffing, to effortlessly handle PVC, ABS, veneer, and solid wood strips. Whether you choose the agile precision of the ELITE modules or the heavy-duty throughput of the FORTE configurations, our edge banders ensure perfect adhesion, crisp corners, and a market-ready finish on every laminate or composite panel.

CONFIGURATION

TECHNICAL SPECIFICATIONS	ELITE E5	ELITE P6	ELITE C7
Thickness of edge-banding belt	0.4-3 mm	0.4-3 mm	0.4-2 mm
Height of Edge-banding tape	12-45 mm	12-50 mm	12-45 mm
Workpiece thickness	10-45 mm	50 mm	12-50 mm
Feeding speed	11m/min	8-11-13 m/min	10/12/14m/min
Air pressure	0.6-0.8 Mpa	0.6-0.8Mpa	0.7 Mpa
Gross power	6.5 kW	9,8 kW	12 kW
Machine outline size	mm	mm	mm
Weight	800 Kg	1200 Kg	1500 Kg
Machine (Height)	1300mm	1300mm	1300mm
Machine (length)	3150mm	3850mm	5200mm
Machine (Width)	700mm	700mm	650mm
package (Height)	1280mm	1280mm	1400mm
Package (length)	2900mm	4280mm	4900mm
Package (Width)	650mm	650mm	650mm

Unit Standard											
#######	Pre-milling	Glue Pot	End Cutting	Rough Trimming	Fine Trimming	Corner Rounding	Scraping	Flexible Flat Scraping	Spray	Buffing	Slotting
ELITE E5		■	■		■		■	■	■	■	
ELITE P6	■	■	■		■		■	■	■	■	
ELITE C7	■	■	■		■	■	■	■	■	■	

EDGE BANDING
Elite E5



Unit Standard	Glue Pot	End Cutting	Fine Trimming	Scraping	Flexible Flat Scraping	Spray	Buffing

Edge Banding Elite E5: Precision Edging . Compact Design . Professional Finish

The Amuzma E5 is a reliable and efficient edge banding machine designed for precision, speed, and ease of use. Perfect for small to medium sized workshops, this machine delivers consistent, high-quality edge finishes on MDF, plywood, particleboard, and similar panel materials. Built with a compact footprint and equipped with essential features for clean, tight bonding, the E5 offers excellent value for workshops looking to improve productivity and finish quality without investing in a large, industrial unit.

SPECIFICATIONS

Thickness of edge-banding belt	0.4-3 mm
Height of Edge-banding tape	12-45 mm
Workpiece thickness	10-45 mm
Feeding speed	11m/min
Air pressure	0.6-0.8 Mpa
Gross power	6.5 kW
Machine outline size	mm
Weight	800 Kg
Packing size	
L	2900mm
W	650mm
H	1280mm
Overall Dimensions	3150 x 700 x 1300 mm

ACCESSORIES




Trimming Units



Gluing and Pressure Unit





Position Adjustment Handle




PLC Touchscreen Control Panel

DIMENSIONS

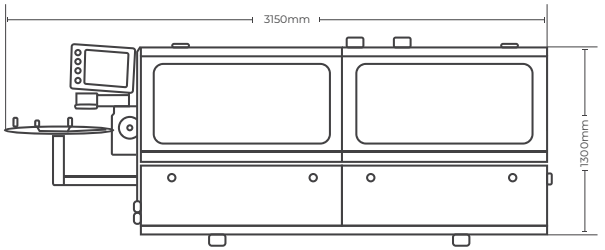

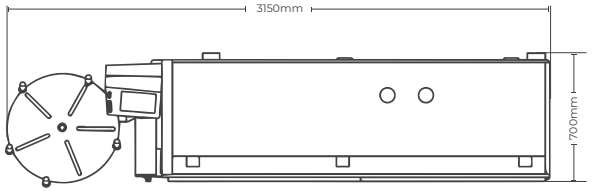

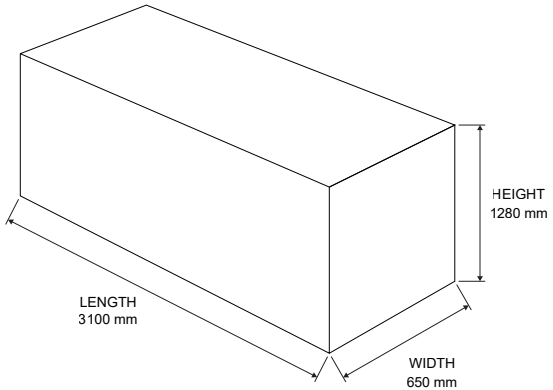

EDGE BANDING
Elite P6



Unit Standard	Glue Pot	End Cutting	Fine Trimming	Scraping	Flexible Flat Scraping	Spray	Buffing

Edge Banding Elite P6: High-Efficiency Edge Banding Solution

The Edge Banding Elite P6 is a robust, industrial-grade woodworking machine designed for precision and high-efficiency performance. Built to handle standard professional panel processing, it balances speed, adaptability, and a heavy-duty frame for consistent, clean edge application.

SPECIFICATIONS

Thickness of edge-banding belt	0.4-3 mm
Height of Edge-banding tape	12-45 mm
Workpiece thickness	50 mm
Feeding speed	8-11-13m/min
Air pressure	0.6-0.8 Mpa
Gross power	9,8 kW
Machine outline size	mm
Weight	1200 Kg
Packing size	
L	3400mm
W	650mm
H	1280mm
Overall Dimensions	3850 x 700 x 1300 mm

ACCESSORIES



Touchscreen Interface



Pre-Milling & Gluing , Pressing Unit





Infeed Guide & Automatic Lubrication Unit




End Trimming & Fine Trimming

DIMENSIONS

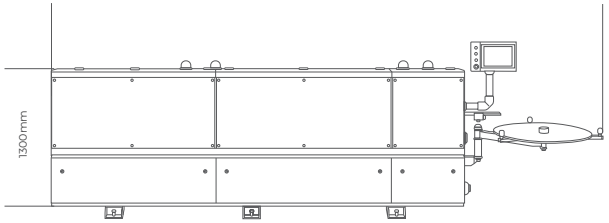

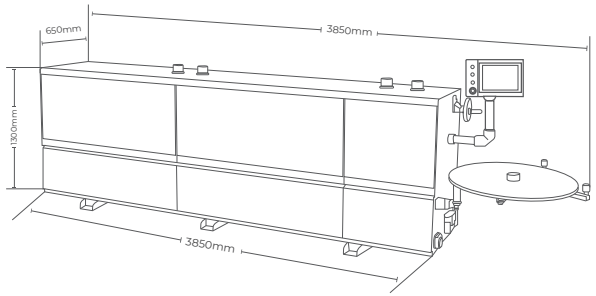


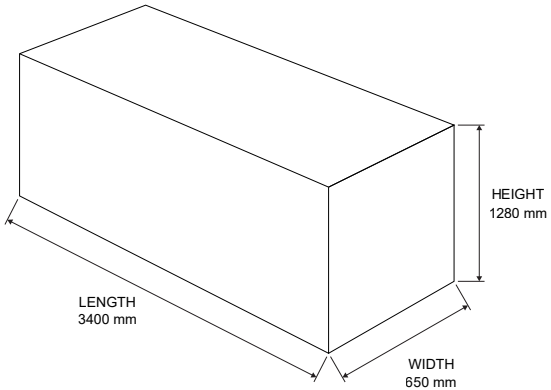

EDGE BANDING
Elite C7

AMUZMA®



Unit Standard									
	Pre-milling	Glue Pot	End Cutting	Fine Trimming	Corner Rounding	Scraping	Flexible Flat Scraping	Spray	Buffing

Edge Banding Elite C7: High-Efficiency Edge Banding Solution

The Edge Banding Elite C7 is a robust, industrial-grade woodworking machine designed for precision and high-efficiency performance. Built to handle standard professional panel processing, it balances speed, adaptability, and a heavy-duty frame for consistent, clean edge application.

SPECIFICATIONS

Thickness of edge-banding belt	0.4-2 mm
Height of Edge-banding tape	12-45 mm
Workpiece thickness	12-50 mm
Feeding speed	10/12/14m/min
Air pressure	0.7 Mpa
Gross power	12 kW
Machine outline size	mm
Weight	1500Kg
Packing size	
L	4900mm
W	650mm
H	1400mm
Overall Dimensions	5200 x 650 x 1300 mm

ACCESSORIES



Touchscreen Interface



Pre-Milling & Gluing , Pressing Unit





Corner Rounding




End Trimming & Fine Trimming

DIMENSIONS

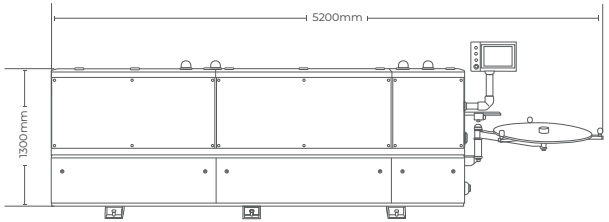

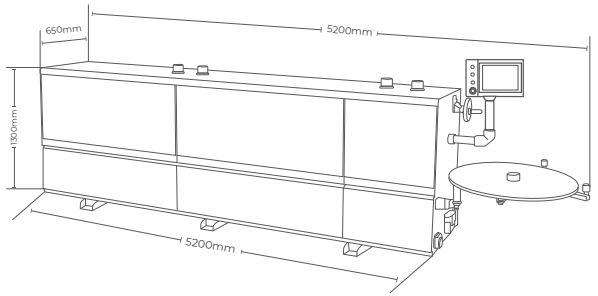

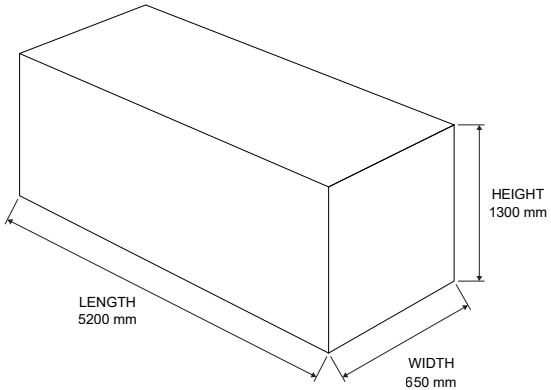

CNC ROUTERS COLLECTION

Forte 13 / 15 / 20CR



The CR Series CNC Routers: Engineered for Precision, Built for Scale

Whether you are a growing workshop or a high-volume industrial manufacturer, the CR Series CNC Routers (Forte 13CR, Forte 15CR, and Firma 20CR) offer a powerful, highly reliable solution engineered to bring maximum precision to your production line. Built on ultra-rigid, heavy-duty frames designed to eliminate vibration, every machine in this lineup features top-tier components—including high-performance HQD 6.0kW air-cooled spindles, incredibly precise Delta 750W servo motors, and the ntuitive Richauto DSP A11 control system for seamless, standalone operation.

CONFIGURATIONS

TECHNICAL FEATURES	FORTE 13CR	FORTE 15CR	FORTE 20CR
Working Table	Aluminum profile table+T slots	Aluminum profile table+T slots	Aluminum profile table+T slots
Working Area	1300x2500x200 mm	1500x3000x200 mm	2000x3800x200 mm
Control System	Richauto DSP A11 control system	Richauto DSP A11 control system	Richauto DSP A11 control system
Spindle Motor	HQD 6.0kw air-cooling spindle	HQD 6.0kw air-cooling spindle	HQD 6.0kw air-cooling spindle
Inverter	Delta 7.5kw inverter	Delta 7.5kw inverter	Delta 7.5kw inverter
Drive System	Delta 750W servo motor and driver	Delta 750W servo motor and driver	Delta 750W servo motor and driver
Speed Reducer	China oubang reducer	China oubang reducer	China oubang reducer
Guide Rails	Taiwan HIWIN 25/25/25mm square rails	Taiwan HIWIN 25/25/25mm square rails	Taiwan HIWIN 25/25/25mm square rails
Transmission	PCRCH 1.5M Helical rack	PCRCH 1.5M Helical rack	PCRCH 1.5M Helical rack
Z-Axis Transmission	Taiwan 2505 TBI ball screw on Z axis	Taiwan 2505 TBI ball screw on Z axis	Taiwan 2505 TBI ball screw on Z axis
Tool Sensor	-	-	
Lubrication System	Auto lubrication	Auto lubrication	Auto lubrication
Control Cabinet	Independent control cabinet D06	Independent control cabinet D06	Independent control cabinet D06
Safety Sensors	Autonics Limit switch	Autonics Limit switch	Autonics Limit switch
Electrical Components	Schneider electrical components	Schneider electrical components	Schneider electrical components
Weight	1015 Kg	1100 Kg	1400 Kg

HIGH PRECISION
Accurate & Smooth Performance

HEAVY STRUCTURE
Built for Long Lasting Durability

ADVANCED CONTROL
Richauto DSP A11 Controller

CNC Router

Firma 15 / 20ATC



High-Precision CNC Router

A powerful and precise CNC router designed for professional woodworking and fabrication. The 13CR Amuzma offers a sturdy frame, smooth motion control, and reliable performance for cutting, engraving, and shaping materials like wood, acrylic, plastic, and soft metals perfect for makers, designers, and small workshops.

CONFIGURATIONS

TECHNICAL FEATURES	FIRMA 15ATC	FIRMA 20ATC
Working Table	Vacuum table+T slots,4 zones	Vacuum table+T slots,4 zones
Working Area	1500*3000*200 mm	2000*3800*200 mm
Control System	TAIWAN LNC MW2200 control system	TAIWAN LNC MW2200 control system
Spindle Motor	HQD 9.0kw air-cooling spindle	HQD 9.0kw air-cooling spindle
Inverter	Delta 11kw inverter	Delta 11kw inverter
Motor and Drive System	Delta 750w servo motor and driver	Delta 750w servo motor and driver
Speed Reducer	Oubang reducer	Oubang reducer
Guide Rails	Taiwan HIWIN 25/25/25mm square rails	Taiwan HIWIN 25/25/25mm square rails
Racks	1.5M Helical rack	1.5M Helical rack
Z-Axis Transmission	Taiwan 2505 TBI ball screw on Z axis	Taiwan 2505 TBI ball screw on Z axis
Tool Sensor	Auto Tool sensor	Auto Tool sensor
Lubrication System	Auto lubrication	Auto lubrication
Control Cabinet	Independent control cabinet D06	Independent control cabinet D06
Safety Sensors	Autonics Limit switch	Autonics Limit switch
Electrical Components	Schneider electrical components	Schneider electrical components
Vacuum pump	Golden Bridge 7.5kw vacuum pump	Golden Bridge 7.5kw vacuum pump
Weight	1180 Kg	2500 Kg

HIGH PRECISION
Accurate & Smooth Performance

HEAVY STRUCTURE
Built for Long Lasting Durability


ADVANCED CONTROL
Richauto DSP A11 Controller

AMUZMA®

Firma 40PL



Forte 40PA

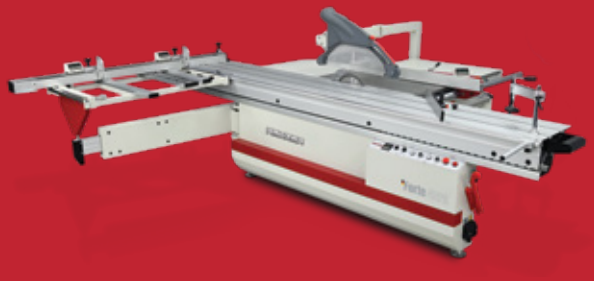

Firma 35PS



ELITE 35PS



Elite 35EU



ELITE 35TS



AMUZMA PANEL SAW SERIES — Elite | Forte | Firma

The AMUZMA Panel Saw Series delivers precision, power, and versatility for professional woodworking. From the compact Elite 35TS to the heavy-duty Firma 40PL, the range features blade diameters from 315mm to 400mm, sliding tables up to 3200mm, and motor power from 4kW to 5.5kW. Engineered for accurate cutting, smooth operation, and lasting durability, these machines meet the demands of workshops and industrial production.

SPECIFICATIONS

TECHNICAL FEATURE	FIRMA 40PL	FORTE 40PA	FIRMA 35PS	ELITE 35PS	ELITE 35EU	ELITE 35TS
Blade specifications						
Main blade diameter	400 mm	400 mm	315 mm	350 mm	315 mm	315 mm
Main blade speed	4500 rpm	4500 rpm	4500 rpm	4000 rpm	3500 rpm/ 50Hz	4500 rpm
Scoring blade diameter	120 mm	120 mm	120 mm	120 mm	120 mm	120 mm
Scoring blade speed	8000 rpm	8500 rpm	8000 rpm	8000 rpm	7900 rpm/50Hz	8000 rpm
Blade tilt	0–45°	0–45°	0–45°	0–45°	0–45°	0–45°
Cutting performance						
Max depth of cut @ 45°	85mm	85 mm	67 mm	67 mm	65 mm	67 mm
Max depth of cut @ 90°	125mm	125 mm	95 mm	90 mm	93 mm	95 mm
Max rip capacity	1250mm	1300 mm	1250 mm	1250 mm	975 mm	900 mm
Sliding beam (standard)						
Sliding beam size	3200×418 mm	3200×435 mm	3200×360 mm	3200×375 mm	3000×360 mm	1200×360 mm
Sliding beam cutting capacity	3200 mm	3200 mm	3200 mm	3200 mm	3000 mm	1250 mm
Blade mechanism (standard)						
Blade rising	Manual	Manual	Manual	Manual	Manual	-
Blade tilting	Manual	Motor	Manual	Manual	Manual	-
Machine body						
Table size	1020(690+720) mm	-	800(530+820) mm	800×470 mm	819(374+650) mm	800×530 mm
Dust extraction outlet	100mm	100 mm	120 mm	120 mm	100 mm	120 mm
Motor (standard)						
Main motor output	3×400V / 7kW S1	3×400V / 5.5kW / 7.5HP	3×400V / 5kW S1	3×380V / 5kW	3×380V / 4kW S1	3×400V / 4kW S1
Scoring motor output	0.75kW S1	1.1kW	0.75kW S1	0.75kW S1	-	0.75kW S1
Weight & dimensions						
Net / gross weight	760 / 870 kg	800 / 850 kg	560 / 680 kg	561 / 680 kg	452 / 527 kg	400 / 460 kg
Length	6700 mm	6700 mm	6700 mm	6700 mm	6700 mm	2550 mm
Width	5790 mm	5790 mm	3900 mm	4450 mm	4450 mm	920 mm
Height	1480 mm	1480 mm	1510 mm	1350 mm	1350 mm	860 mm

PANEL SAW
Firma 40PL

AMUZMA®



Heavy-Duty Performance. Professional Precision.

The Firma 40PL is a powerful 16" panel saw for medium-sized workshops, offering a 3200mm cutting capacity. Built with industrial-grade materials, it ensures smooth, accurate cuts in MDF, plywood, laminates, and hardwood. Durable and precise, it's ideal for growing businesses.

SPECIFICATIONS

Main Blade Diameter	400 mm
Main Blade Speed	4500 rpm
Scoring Blade Diameter	120 mm
Scoring Blade Speed	8000 rpm
Blade Tilt	0-45°
Max Depth of Cut @ 45°	85 mm
Max Depth of Cut @ 90°	125 mm
Max Rip Capacity	1250 mm
Sliding Beam Size	
■ Standard	3200×418 mm
□ Option	3800 x 418 mm
Sliding Beam Cutting Capacity	
■ Standard	3200 mm
□ Option	3800 mm
Blade Rising	
■ Standard	Manual Raised
□ Option	Motor Raised

Blade Tilting	
■ Standard	Manual Tilting
□ Option	Motor Tilting
Table Size	1020(690+720) mm
Dust Extraction Outlet	100mm
Main Motor Output	
□ 3*400V	5.5kW S1
■ 3*400V	7kW S1
Scoring Motor Output	0.75kW S1
Net/Gross Weight	760/870kgs
Package size	
■ Pallet	2300×1190×910/3675×505×280 mm
□ Wood box	2300×1190×910/3675×505×280 mm
Dimensions	
Length	6700 mm
Width	5790 mm
Height	1480 mm

■ Standard Equipment □ Optional Equipment

ACCESSORIES



Scoring Blade Adjustment Knob



Handwheel for Blade Tilt





Overhead Saw Blade Guard




Sliding Table Handle and Control Panel

DIMENSIONS

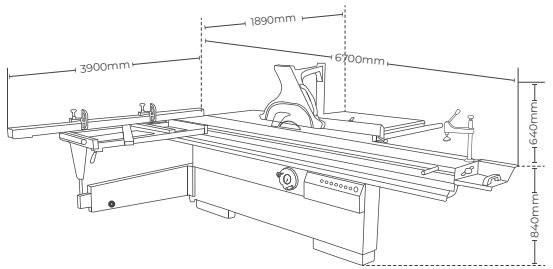

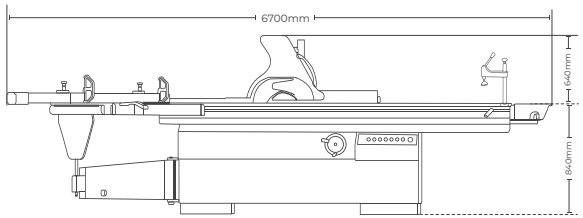



PANEL SAW
Forte 40PA

AMUZMA®



Forte 40PA Panel Saw – Precision Cutting Solution

A reliable panel saw designed for precise, smooth, and efficient cutting of MDF, plywood, laminated boards, and solid wood panels. Its strong motor and sliding beam system ensure stable performance for professional woodworking. Perfect for furniture factories, carpentry workshops, and industrial panel processing.

SPECIFICATIONS

Main Blade Diameter	400 mm	Blade Rising	Manual Raised
Spindle Diameter	30 mm	Blade Tilting	Motor Tilting
Main Blade Speed	4500 rpm	Dust Extraction Outlet	100mm
Scoring Blade Diameter	120 mm	Main Motor Output	
Scoring Blade Speed	8500 rpm	■ 3*400V	5.5kW / 7.5HP
Spindle of Scoring Saw	20 mm	□ 3*400V	7.5 kW / 10 HP
Blade Tilt	0-45°	Scoring Motor Output	1.1kW
Max Depth of Cut @ 45°	85 mm	Net/Gross Weight	800/850kgs
Max Depth of Cut @ 90°	125 mm	Package size	
Max Rip Capacity	1300 mm	Wood box	2300 X 1190 X 1000 mm
Sliding Beam Size		Dimensions	
■ Standard	3200×435 mm	Length	6700 mm
□ Option	3800×435 mm	Width	5790 mm
Sliding Beam Cutting Capacity		Height	1480 mm
■ Standard	3200 mm		
□ Option	3800 mm		

■ Standard Equipment □ Optional Equipment


ACCESSORIES



Saw Unit Blade Assembly



Main Control Panel





Crosscut Fence Support Table & Support Roller




Automatic Central Lubrication Pump

DIMENSIONS

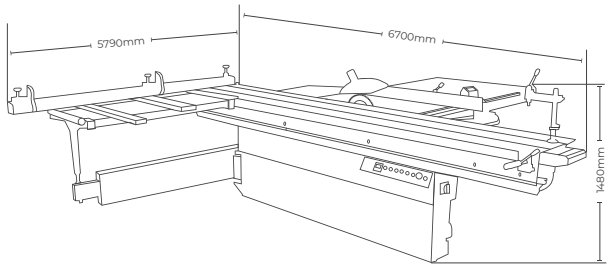

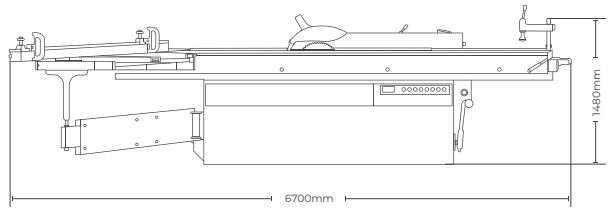



PANEL SAW
Firma 35PS

AMUZMA®



Compact Power for Precision Cutting

The Firma 35PS is a space-saving, high-performance panel saw built for small to mid-sized workshops. Despite its compact size, it offers full-scale industrial precision, effortlessly cutting panels up to 3200mm. Ideal for furniture, cabinets, and woodworking, it features a motorized blade rise for smooth, efficient operation.

SPECIFICATIONS

Main Blade Diameter	315 mm
Main Blade Speed	4500 rpm
Scoring Blade Diameter	120 mm
Scoring Blade Speed	8000 rpm
Blade Tilt	0-45°
Max Depth of Cut @ 45°	67 mm
Max Depth of Cut @ 90°	95 mm
Max Rip Capacity	1250 mm
Sliding Beam Size	
■ Standard	3200×360 mm
□ Option	2200/2600/3800×360 mm
Sliding Beam Cutting Capacity	
■ Standard	3200 mm
□ Option	2200/2600/3800 mm
Blade Rising	
■ Standard	Manual Raised
□ Option	Motor Raised

Blade Tilting	
■ Standard	Manual Tilting
□ Option	Motor Tilting
Table Size	800(530+820) mm
Dust Extraction Outlet	120mm
Main Motor Output	
■ 3*400V	5kW S1
□ 3*400V	4kW S1
Scoring Motor Output	0.75kW S1
Net/Gross Weight	560/680kgs
Package size	
Pallet	2300×1080×1150/3615×480×210 mm
Wood box	2300 X 1160 X 1160/3615×480×210 mm
Dimensions	
L	6700 mm
W	3900 mm
H	1510 mm

■ Standard Equipment □ Optional Equipment

ACCESSORIES



Sliding Carriage Handle and Control Panel



Main and Scoring Blade Assembly





Manual Handwheel for Blade Tilt




Sliding Table Carriage End Grip

DIMENSIONS

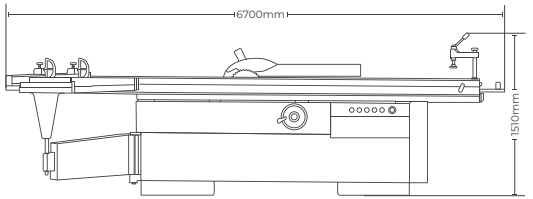

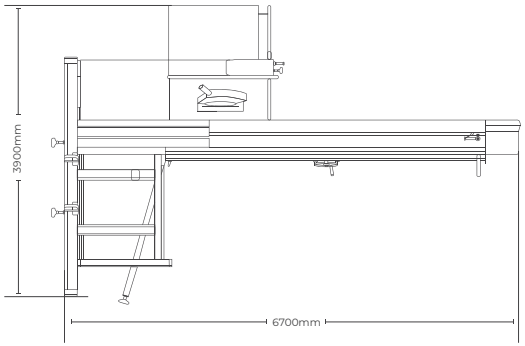



PANEL SAW
Elite 35PS



AMUZMA Elite 35PS Panel Saw

The AMUZMA Elite 35PS is a high-performance panel saw built for large-scale precision. Featuring a standard 3200 mm sliding beam, an expansive 1250 mm rip capacity, and a powerful 5 kW main motor, it easily handles demanding sheet sizing jobs. With its heavy-duty dual-blade system (350 mm main / 0.75 kW scoring) and options for motorized controls, this robust machine delivers flawless, chip-free cuts for high-output professional woodworking.

SPECIFICATIONS

Main Blade Diameter	350 mm
Main Blade Speed	4000 rpm
Scoring Blade Diameter	120 mm
Scoring Blade Speed	8000 rpm
Blade Tilt	0-45°
Max Depth of Cut @ 45°	67 mm
Max Depth of Cut @ 90°	90 mm
Max Rip Capacity	1250 mm
Sliding Beam Size	
■ Standard	3200×375 mm
□ Option	2200/2600/3800×375 mm
Sliding Beam Cutting Capacity	
■ Standard	3200 mm
□ Option	2200/2600/3800 mm
Blade Rising	
■ Standard	Manual Raised
□ Option	Motor Raised

Blade Tilting	
■ Standard	Manual Tilting
□ Option	Motor Tilting
Table Size	800x470mm/800x820mm
Dust Extraction Outlet	120mm
Main Motor Output	
3*380V	5kW
Scoring Motor Output	0.75kW S1
Angle Cutting Device	940x150x1500 mm 4/4.5 kgs
Optional accessories	
Simple Guard	
CE OverHead Saw Guard	
Net/Gross Weight	561/680kgs
Package size	
Wood box	2300 X 1160 X 1160/3615×480×210 mm
Dimensions	
L x W x H	6700 x 4450 x 1350mm

■ Standard Equipment □ Optional Equipment


ACCESSORIES



Scoring Blade Adjustment Controls



Outrigger Table and Crosscut Fence





Sliding Table Push Handle




Cutting Unit , Guard Assembly

DIMENSIONS

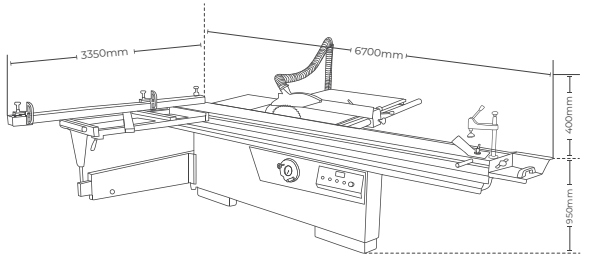

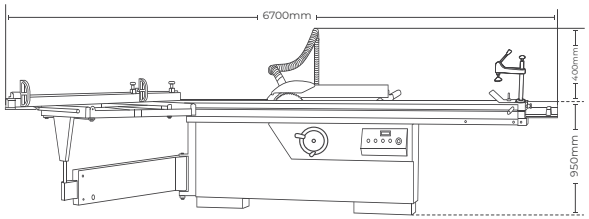



PANEL SAW
Elite 35EU



High-Precision 3000mm Panel Saw

This industrial-grade panel saw features a robust 3000 mm sliding beam and a dual-blade system (4 kW main blade / 0.75 kW scoring blade) engineered for flawless, chip-free cutting of large sheets. Built with manual blade rising and a 0-45° smooth tilt mechanism, it delivers a maximum cutting depth of 93 mm. Combining heavy-duty reliability with precise manual control, it is the perfect core workhorse for professional woodworking workshops looking to optimize their panel sizing operations.

SPECIFICATIONS

Blade Specifications		Blade Rising	Manual Rising
Main Blade Diameter	315 mm	Blade Tilting	Manual Tilting
Main Blade Speed	3500rpm/60Hz	Dust Extraction Outlet	100 mm
Scoring Blade Diameter	120 mm	Main Motor Output:	
Scoring Blade Speed	7900rpm/60Hz	3*380V	4 kw S1
Blade Tilt	0-45°	Net/Gross Weight	452/527 kgs
Max Depth of Cut @ 45°	65 mm	Package Size (Wood)	2005x1140x870 mm
Max Depth of Cut @ 90°	93 mm	Dimensions	
Max Rip Capacity	975 mm	H	1350mm
Sliding Beam Size	3000×360 mm	L	6700mm
Sliding Beam Cutting Capacity	3000 mm	W	4450 mm
Table Size	819(374+650) mm		


ACCESSORIES



Blade Tilt and Height Adjustment Controls



Cutting Unit Assembly, Main and scoring Blade





Rip Fence Assembly (Parallel Guide)




Miter Gauge Assembly

DIMENSIONS

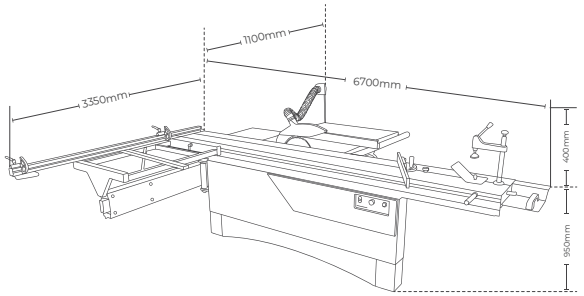

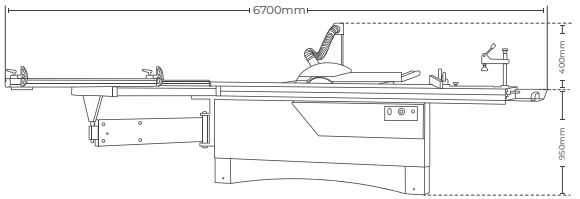



PANEL SAW
Elite 35TS

AMUZMA®



Compact Power, Precision Cutting

This heavy-duty panel saw is specifically engineered for small spaces, allowing workshops with limited footprints to achieve full-sized performance. Built with a cast iron table and a robust steel frame, the machine provides the stability and strength required for professional -grade durability. It is designed to deliver smooth, accurate cuts consistently, making it a perfect and versatile solution for processing both panels and solid timber.

SPECIFICATIONS

Blade Specifications	
Main Blade Diameter	315 mm
Main Blade Speed	4500 rpm
Scoring Blade Diameter	120 mm
Scoring Blade Speed	8000 rpm
Blade Tilt	0-45°
Max Depth of Cut @ 45°	67 mm
Max Depth of Cut @ 90°	95 mm
Max Rip Capacity	
■ Standard	900 mm
□ Option	1250 mm
Sliding Beam Size	
■ Standard	1200 × 360 mm
□ Option	1600 × 360 mm

Sliding Beam Cutting Capacity	
■ Standard	1250 mm
□ Option	1600 mm
Table Size	800 × 530 mm
Dust Extraction Outlet	120 mm
Main Motor Output:	
■ 3*400V	4kW S1
□ 3*400V	2.5kW S1
□ 3*400V	5kW S1
□ 1*230V	3kW S1
Scoring Motor Output	0.75kW S1
Net/Gross Weight	400/460 kgs
Package Size	1300 × 1000 × 1100 mm
Dimensions	
L x W x H	2550 x 920 x 860 mm

■ Standard Equipment □ Optional Equipment


ACCESSORIES



Crosscut Miter Fence



Blade Tilt Handwheel





Rip Fence with Micro-Adjustment Mechanism




Sliding Table with End with Tool Tray

DIMENSIONS

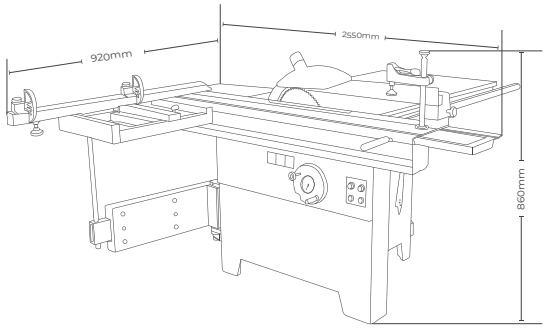

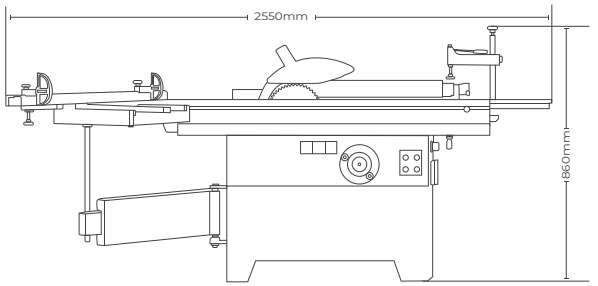



SPINDLE MOULDER
Elite 30SM



Precision Engineering, Built for Professionals.

The Spindle Moulder Elite 30SM is a high-performance machine with a durable cast iron bed, ensuring precise cuts and long-lasting reliability. Perfect for shaping, profiling, and joinery on hardwoods and composites, it delivers exceptional value for serious craftsmen.

SPECIFICATIONS


Spindle diameter	30 (32:35:40:50) mm
Spindle speeds	1400/3500/6000/8000 RPM
Max. spindle stroke	140 mm
Spindle length	130 mm
Spindle tilting	-5°+45°
Max. diameter of table opening	220 mm
Max. tool diameter above the table	200/250 mm
Height of table	890 mm
Max. height of machine	1300 mm
Table size	1000 x 350 mm
Suction dust hood diameter	100 mm
Motor	
■ 3*400V	4 kW S6
□ 1*230V	3 kW S6
Net/Gross Weight	235/280 kg
Package Size	1150 x 900 x 1085 mm
Dimensions (H x L x W)	1300 x 1000 x 1400mm

■ Standard Equipment □ Optional Equipment

ACCESSORIES



Spindle Tilt Handwheel and Angle Scale



Sliding Table End with Pull Handle





Moulder Fence Hood with Dust Extraction Port




Spindle Height Handwheel and Main Control Panel

DIMENSIONS

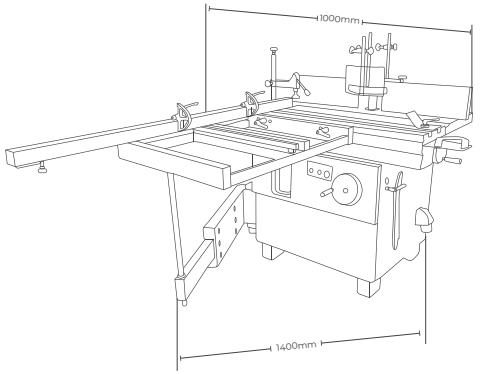

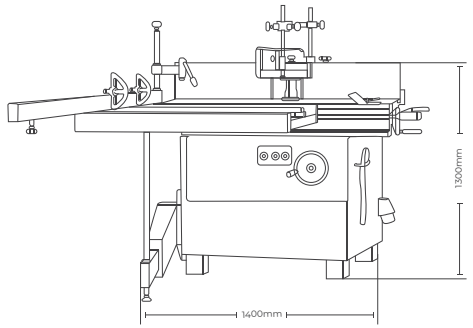



PLANER & THICKNESSERS
Elite 41CM



PLANER & THICKNESSERS
Elite 41CS



PLANER
Elite 41PF



THICKNESSERS
Elite 41TH



THICKNESSERS
Firma 63TH



FIRMA & ELITE SERIES
Surface Planers & Thicknessers

The AMUZMA Firma and Elite Series offers precision-engineered surface planers, thicknessers, and combination machines for professional woodworking. Featuring the Elite 41CM, 41CS, 41PF, 41TH, and Firma 63TH, the range delivers exceptional accuracy, durability, and performance. Designed for smooth finishing, precise dimensioning, and efficient timber preparation, these machines meet the demands of modern workshops and industrial production.

PLANER & THICKNESSER

TECHNICAL SPECIFICATIONS	ELITE 41CM	ELITE 41CS
Feed Speed	7m/min	7m/min
Cutter block Speed	5500rpm	5500rpm
Cutter block Diameter	70mm	70mm
Max Thicknesser Height	4-225mm	4-225mm
Max Thicknesser Width	410mm	410mm
Min Length of Workpiece	160mm	160mm
Max Depth of Cut	4mm	4mm
Depth Indicator		
Scale	■	■
Digital Readout	□	□
Cutterhead		
Straight Knives	3pcs/410x30x3mm	3pcs/410x30x3mm
2 Slot Spiral	44pcs/15x15x2.5mm	44pcs/15x15x2.5mm
Over Length of Planer Tables	1669mm	1669mm
Thickness Table Size	650-407mm	650-407mm
Extractor Port Dia	120mm	120mm
Cutting Motor Output		
■ 3*400V	4kW S6	4kW S6
□ 1*230V	3kW S6	3kW S6
Net/Gross Weight	294/352kgs	294/352kgs
Package Size		
H	1710mm	1710mm
L	740mm	740mm
W	1117mm	1117mm
Dimensions		
H	1002mm	1002mm
L	1659mm	1659mm
W	1350mm	1350mm

■ Standard Equipment □ Optional Equipment

PLANNER

Cutter block Speed	5500rpm
Cutter block Diameter	70mm
Max Depth of Cut	4mm
Cutterhead	
■ Straight Knives cutterhead	3pcs/410x30x3mm
□ 2 Slot Spiral Cutterhead	44pcs/15x15x2.5mm
Over Length of Planer Tables	2000mm
Extractor Port Dia	120mm
Cutting Motor Output	
■ 1*230V	3kW S6
□ 3*400V	4kW S6
Net/Gross Weight	290/351kgs
Package Size	2118×818×1138mm
Dimensions	
H x L x W	2080mm x 780mm x 1127mm

THICKNESSERS

TECHNICAL SPECIFICATIONS	ELITE 41TH	FIRMA 63TH
Feed Speed	6.5 m/min	4-16m/min (variable speed)
Cutter block Speed	4200 rpm	5500 rpm
Cutter block Diameter	95 mm	115 mm
Max Thicknesser Height	4-220 mm	5-300 mm
Max Thicknesser Width	410 mm	630 mm
Min Length of Workpiece	5mm	280 mm
Max Depth of Cut	4mm	8 mm
Depth Indicator	Scale	-
Cutterhead		
■ Straight Knives Cutterhead	3pcs/410x30x3mm	4pcs/630x30x3mm
□ 3 Slot Spiral Cutterhead	54pcs/15x15x2.5mm	104pcs/15x15x2.5mm
□ 4 Slot Spiral Cutterhead	72pcs/15x15x2.5mm	156pcs/15x15x2.5mm
Thickness Table Size	750x408 mm	1050×630 mm
Extractor Port Dia.	120 mm	150 mm
Cutting Motor Output		
■	3*400V - 4kW S6	3*400V - 5.5kW S1
□	1*230V - 3kW S6	3*400V - 7.5kW S1
Lifting Motor Output	-	0.25kW
Feeding Motor Output	-	0.55kW
Net/Gross Weight	306/367kgs	650/716 kgs
Package Size	740x710x1117 mm	1220×1150×1315mm
Dimensions (H x L x W)	954mm x 700mm x 900mm	1150mm x 1200mm x 1220mm

PLANER & THICKNESSER
Elite 41CM



Versatile, Powerful, Precise

The Planer and Thicknesser Elite 41CM handles large timber with ease (410mm width, 255mm height). Switch between surfacing and thicknessing effortlessly with a single-handed table lift. The extra-large aluminium fence ensures stability, and quick, accurate adjustments are made with cantered controls and cam-locking mechanisms."

SPECIFICATIONS

Feed Speed	7m/min
Cutter block Speed	5500rpm
Cutter block Diameter	70mm
Max Thicknesser Height	4-225mm
Max Thicknesser Width	410mm
Min Length of Workpiece	160mm
Max Depth of Cut	4mm
Depth Indicator	
■ Scale	
☐ Digital Readout	
Cutterhead	
■ Straight Knives	3pcs/410x30x3mm
☐ 2 Slot Spiral	44pcs/15x15x2.5mm
Over Length of Planer Tables	1669mm
Thickness Table Size	650-407mm
Extractor Port Dia	120mm


Cutting Motor Output	
■ 3*400V	4kW S6
☐ 1*230V	3kW S6
Net/Gross Weight	294/352kgs
Package Size	1710x740x1117mm
Dimensions	
H	1002mm
L	1659mm
W	1350mm

■ Standard Equipment ☐ Optional Equipment


ACCESSORIES



Manual Handwheel with Readout



Helical Cutterhead Assembly





Thicknessing Table Extension




Adjustment Lever

DIMENSIONS

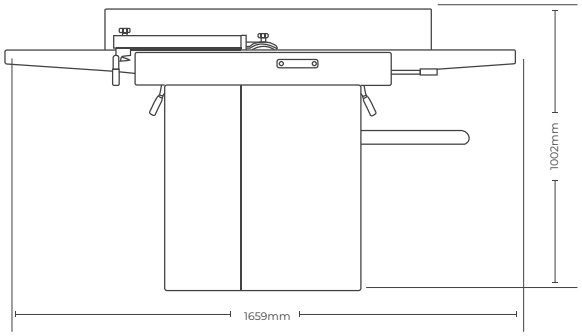

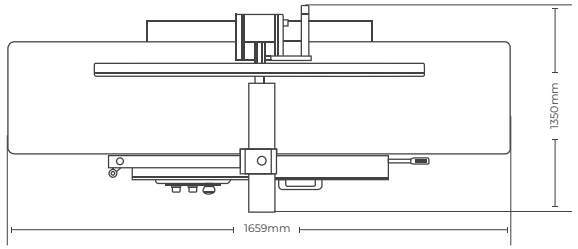



PLANER & THICKNESSER
Elite 41CS



Versatile, Powerful, Precise

The Planer and Thicknesser Elite 41CS handles large timber with ease (410mm width, 255mm height). Switch between surfacing and thicknessing effortlessly with a single-handed table lift. The extra-large aluminium fence ensures stability, and quick, accurate adjustments are made with centered controls and cam-locking mechanisms.

SPECIFICATIONS


Feed Speed	7m/min	Cutting Motor Output	
Cutter block Speed	5500rpm	■ 3*400V	4kW S6
Cutter block Diameter	70mm	□ 1*230V	3kW S6
Max Thicknesser Height	4-225mm	Net/Gross Weight	294/352kgs
Max Thicknesser Width	410mm	Package Size	1710x740x1117mm
Min Length of Workpiece	160mm	Dimensions	
Max Depth of Cut	4mm	H	1002mm
Depth Indicator		L	1659mm
■ Scale		W	1350mm
□ Digital Readout			
Cutterhead			
■ Straight Knives	3pcs/410x30x3mm		
□ 2 Slot Spiral	44pcs/15x15x2.5mm		
Over Length of Planer Tables	1669mm		
Thickness Table Size	650-407mm		
Extractor Port Dia	120mm		

■ Standard Equipment □ Optional Equipment


ACCESSORIES



Manual Handwheel with Readout



Helical Cutterhead Assembly





Thicknessing Table Extension




Adjustment Lever

DIMENSIONS

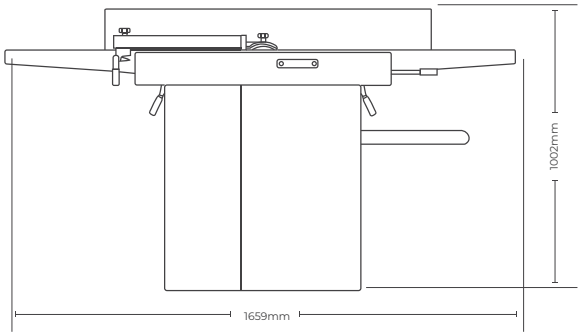

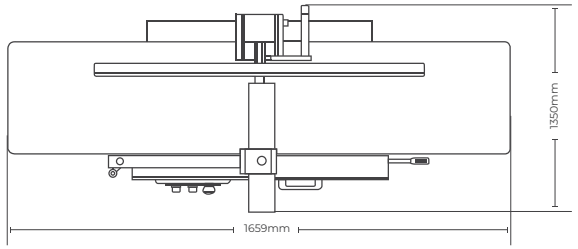



PLANER
Elite 41PF



Long Bed. Solid Build. Precise Results

The Planer Elite 41PF offers superior accuracy and support for long workpieces. With heavy-duty cast iron tables and a parallelogram adjustment system, it ensures vibration-free performance. The robust fence and front-mounted controls enable fast, precise adjustments for efficient operation.

SPECIFICATIONS

Cutter block Speed	5500rpm
Cutter block Diameter	70mm
Max Depth of Cut	4mm
Cutterhead	
■ Straight Knives cutterhead	3pcs/410x30x3mm
□ 2 Slot Spiral Cutterhead	44pcs/15x15x2.5mm
Over Length of Planer Tables	2000mm
Extractor Port Dia	120mm
Cutting Motor Output	
□ 3*400V	4kW S6
■ 1*230V	3kW S6
Net/Gross Weight	290/351kgs
Package Size	2118×818×1138mm
Dimensions	
H x L x W	2080mm x 780mm x 1127mm

■ Standard Equipment □ Optional Equipment

ACCESSORIES



Main Control Panel with Emergency Stop



Bridge-Type Cutterhead Safety Guard





Precision Ground Table




Adjustment Lever

DIMENSIONS

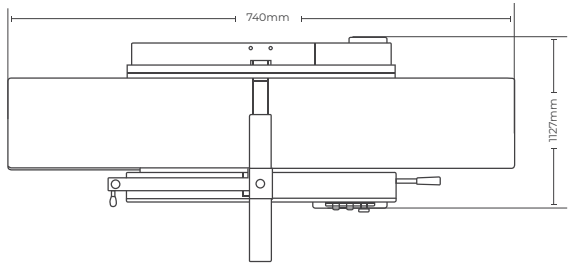

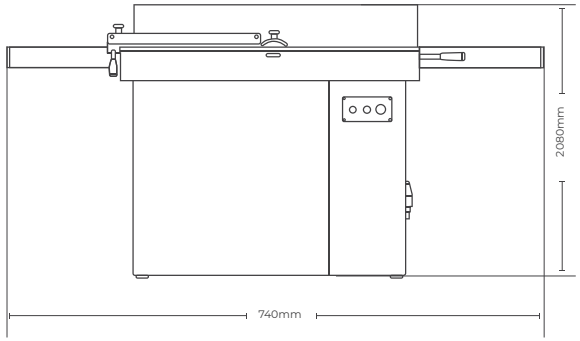



THICKNESSER
Elite 41TH

AMUZMA®



Compact Power for Professional Results

The Elite 41TH is a heavy-duty, space-efficient thicknesser with a 410mm planing width, ideal for jointing and thicknessing wide boards. It delivers consistent performance with a 4mm depth of cut, even on tough hardwoods. Perfect for home workshops, small industries, or woodworking clubs seeking professional results in limited space.

SPECIFICATIONS

Feed Speed	6.5 m/min	Cutting Motor Output	
Cutter block Speed	4200 rpm	■ 3*400V	4kW S6
Cutter block Diameter	95 mm	□ 1*230V	3kW S6
Max Thicknesser Height	4-220 mm	Net/Gross Weight	306/367kgs
Max Thicknesser Width	410 mm	Package Size	740x710x1117 mm
Min Length of Workpiece	156mm	Dimensions	
Max Depth of Cut	5mm	H x L x W	954mm x 700mm x 900mm
Depth Indicator			
■ Scale			
□ Digital			
Cutterhead			
■ Straight Knives Cutterhead 3pcs/410x30x3mm			
□ 3 Slot Spiral Cutterhead 54pcs/15x15x2.5mm			
□ 4 Slot Spiral Cutterhead 72pcs/15x15x2.5mm			
Thickness Table Size	750x408 mm		
Extractor Port Dia.	120 mm		

■ Standard Equipment □ Optional Equipment


ACCESSORIES



Heavy-Duty Cast-Iron Thicknessing Table



Table Height Handwheel





Planer Cutterhead, Power Feed Roller Assembly




Main Control Panel with Emergency Stop

DIMENSIONS

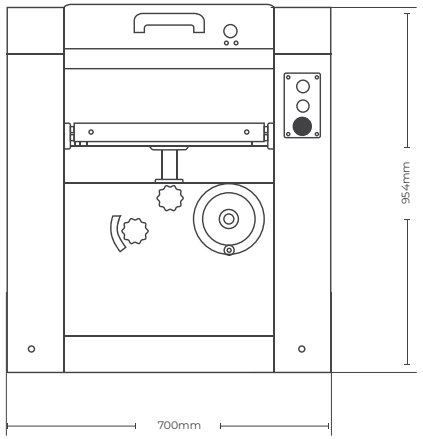

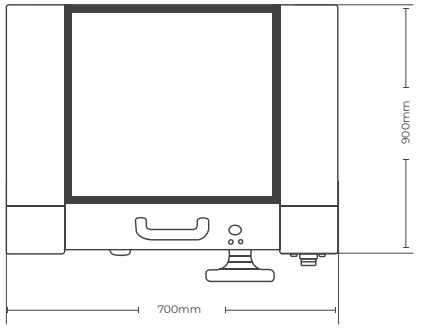



THICKNESSER
Firma 63TH

AMUZMA®



Industrial Strength, Precision Results

Built for high-volume, professional woodworking, the Firma 63TH offers powerful performance with precision control. Features include variable feed speed, electronic table lift, and digital thickness setting. Its durable build, spring-loaded pressure bar, and four-column support ensure smooth, stable operation even under heavy loads. Reliable. Accurate. Built to last.

SPECIFICATIONS

Feed Speed	4-16m/min (variable speed)	Lifting Motor Output	0.25kW
Cutter block Speed	5500 rpm	Feeding Motor Output	0.55kW
Cutter block Diameter	115 mm	Net/Gross Weight	650/716kgs
Max Thicknesser Height	5-300 mm	Package Size	1220×1150×1315mm
Max Thicknesser Width	630 mm	Dimension	
Min Length of Workpiece	280 mm	H	1150mm
Max Depth of Cut	8 mm	L	1200mm
Cutterhead		W	1220mm
■ Straight Knives Cutterhead 4pcs/630x30x3mm			
□ 4 Slot Spiral Cutterhead 104pcs/15x15x2.5mm			
□ 6 Slot Spiral Cutterhead 156pcs/15x15x2.5mm			
Thickness Table Size	1050×630 mm		
Extractor Port Dia.	150 mm		
Cutting Motor Output			
■ 3*400V	5.5kW S1		
□ 3*400V	7.5kW S1		

■ Standard Equipment □ Optional Equipment

ACCESSORIES



Electro-Mechanical Control Panel



Hinged Internal Chip Deflector





Heavy-Duty Thicknessing Bed




Outfeed Table Safety Shroud

DIMENSIONS

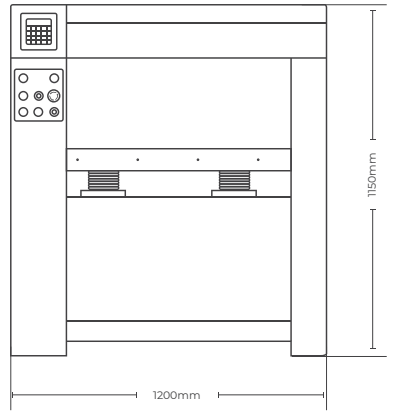

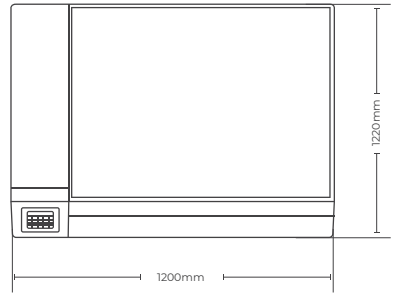



DUST COLLECTORS

AMUZMA®

ABS5000



DC2200



RDC3800



High-Efficiency Industrial Dust Collection Systems

The AMUZMA lineup of industrial dust collectors is designed to maintain clean, safe, and compliant working environments in woodworking, manufacturing, and fabrication shops. By combining powerful extraction motors with high-capacity multi-bag filtration systems, these machines effectively capture airborne particulates and workshop debris at the source.

SPECIFICATIONS

TECHNICAL FEATURES	AMUZMA ABS5000	AMUZMA DC2200	AMUZMA RDC3800
Power / Voltage	230V / 50Hz	230V / 50Hz	230V / 50Hz
Three Phase Voltage	400V, 3 Phase, 50Hz	400V, 3 Phase, 50Hz	400V, 3 Phase, 50Hz
Motor Power	3.8 kW	3800 W	3.8 kW
Air Flow Capacity	3900 m^3/hr	5000 m^3/hr	3900 m^3/hr
Dust Bag Capacity	380 Liter	2 × 200 Liter	380 Liter
Main Inlet Size	1 × 150 mm	200 mm	1 × 150 mm
Additional Inlet Size	3 × 100 mm	4 × 100 mm	3 × 100 mm
Packing Size	1170 × 590 × 570 mm	1590 × 610 × 525 mm	1170 × 590 × 570 mm
20 ft Container Quantity	80 pcs	50 pcs	80 pcs
40 ft Container Quantity	160 pcs	105 pcs	160 pcs
40 ft High Cube Quantity	-	131 pcs	-
Net / Gross Weight	60 / 65 kg	60 / 65 kg	60 / 65 kg
Dimensions	1590 x 610 x 525mm	1170 x 590 x 570mm	1170 x 590 x 570 mm

DUST COLLECTOR
ABS5000



Clean Air. Quiet Power. Reliable Extraction

The ABS5000 is a powerful, high-capacity dust collector built for professional workshops and industrial use. It features strong suction, efficient filtration, and large collection bags to improve air quality and protect equipment. Its durable steel frame and low-noise operation make it a reliable, quiet addition to any workspace.

SPECIFICATIONS

Power / Voltage	230V / 50Hz
Three Phase Voltage	400V, 3 Phase, 50Hz
Motor Power	3.8 kW
Air Flow Capacity	3900 m³/hr
Dust Bag Capacity	380 Liter
Main Inlet Size	1 × 150 mm
Additional Inlet Size	3 × 100 mm
Packing Size	1590 × 610 × 525 mm
20 ft Container Quantity	80 pcs
40 ft Container Quantity	160 pcs
40 ft High Cube Quantity	-
Net / Gross Weight	60 / 65 kg
Dimensions	1590 x 610 x 525mm

ACCESSORIES



Induction Motor with Magnetic Safety Switch



Multi-Port Intake Manifold




Upper High-Efficiency Filter Bags



Reinforced Base with Swivel Casters

DIMENSIONS

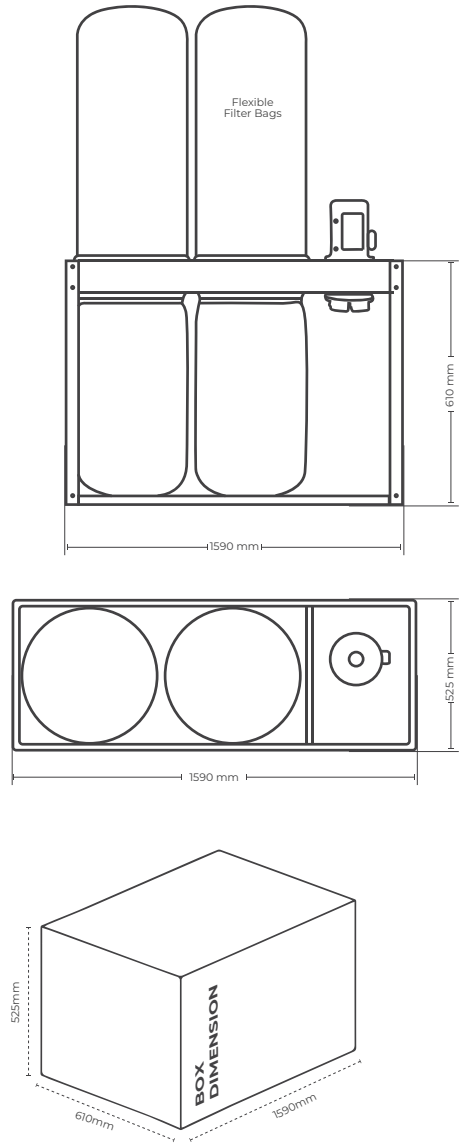

DUST COLLECTOR
DC2200



Efficient Extraction. Compact Design. Clean Results

The DC2200 is a compact and reliable dust collector, perfect for light to moderate use in smaller workshops. It offers consistent suction, a space-saving design, and an easy bag-change system—ideal for hobbyists, small businesses, and schools.

SPECIFICATIONS

Power / Voltage	230V / 50Hz
Three Phase Voltage	400V, 3 Phase, 50Hz
Motor Power	3800 W
Air Flow Capacity	5000 m³/hr
Dust Bag Capacity	2 × 200 Liter
Main Inlet Size	200 mm
Additional Inlet Size	4 × 100 mm
Packing Size	1170 x 560 x 570mm
20 ft Container Quantity	50 pcs
40 ft Container Quantity	105 pcs
40 ft High Cube Quantity	131 pcs
Net / Gross Weight	60 / 65 kg
Dimensions	1590 × 610 × 525 mm

ACCESSORIES



3-Way Intake Manifold



Y-Shaped Distribution Manifold





High-Efficiency Filter Bag




Induction Motor with Magnetic Safety Switch

DIMENSIONS

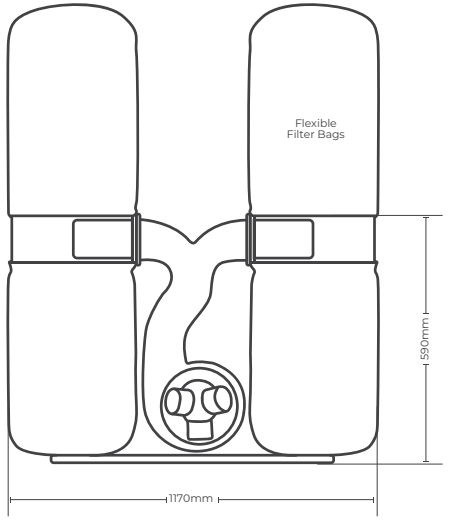

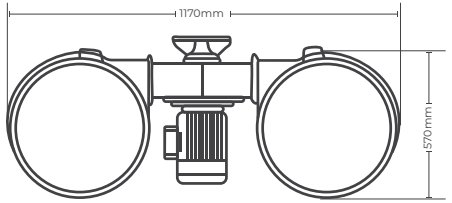



DUST COLLECTOR
RDC3800



Compact Power. Reliable Dust Extraction. Workshop Ready.

The RDC3800 is a compact, high-performance dust collector ideal for small to mid-sized workshops. It combines strong suction, portability, and efficient filtration to keep your workspace clean and equipment protected. With durable steel construction and an easy-to-empty collection system, it's built for reliable daily use.

SPECIFICATIONS

Power / Voltage	230V / 50Hz
Three Phase Voltage	400V, 3 Phase, 50Hz
Motor Power	3.8 kW
Air Flow Capacity	3900 m^3/hr
Dust Bag Capacity	380 Liter
Main Inlet Size	1 × 150 mm
Additional Inlet Size	3 × 100 mm
Packing Size	1690 × 620 × 565 mm
20 ft Container Quantity	80 pcs
40 ft Container Quantity	160 pcs
40 ft High Cube Quantity	-
Net / Gross Weight	60 / 65 kg
Dimensions	1170 x 590 x 570 mm

ACCESSORIES



Induction Motor with Magnetic Safety Switch



Reinforced Base with Swivel Casters




High-Efficiency Filter Bag



Multi-Port Intake Manifold

DIMENSIONS

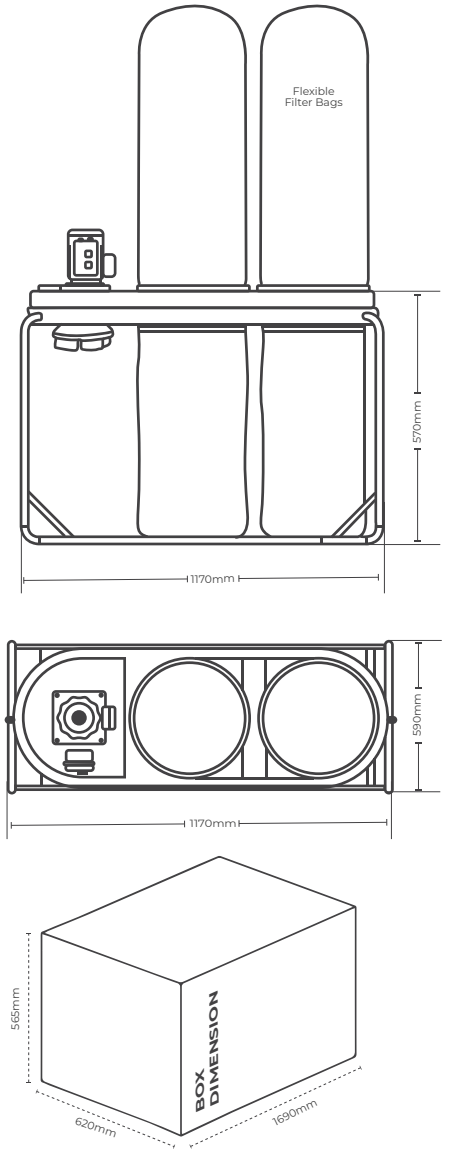

AMUZMA®

Headquartered in the United Arab Emirates, AMUZMA is a growing international machinery brand committed to quality, innovation, and precision engineering. Combining European engineering standards with advanced manufacturing technology, we deliver reliable, high-performance, and cost-effective machinery solutions. With a vision for global expansion, AMUZMA empowers industries worldwide through innovation, efficiency, and lasting performance.



AMUZMA®

Contact Us

+971 45478088

+971 50 857 6840

info@amuzmamachinery.com

www.amuzmamachinery.com

Ras Al Khor, Industrial Area 2,
United Arab Emirates

Website

Contact Us

Follow Us

@amuzmamachinery